
Installation Instructions

Please carefully read complete instructions before beginning installation.

Note: These instructions are for installation with solid surface, composite material countertops. Houzer recommends professional countertop installers and is not responsible for damages to the countertop or sink during installation.

1. Remove your new Enex sink from the carton. Use caution as sink edges may cause minor cuts. Wear safety gloves for your protection.
2. Remove your old sink and check cutout opening of the counter top to be sure it is sized properly. See cutout dimensions below and verify your new sink will fit to the opening by setting new sink to the counter top temporarily. Cutout dimensions of all Enex sinks are as below.

Sink Type	Overall Size	Cutout dimension
Single Bowl	25" X 22"	24-3/8" X 21-3/8"
Double Bowl	33" X 22"	32-3/8" X 21-3/8"
Mobile Home	33" X 19"	32-3/8" X 18-3/8"
Bar Sink	15" X 15"	14-3/8" X 14-3/8"

3. If you are installing a sink to a new counter top please follow directions as shown.
4. Place sink upside down on the counter top in desired position and trace completely outside sink rim using soft lead pencil. (Figure 1)
5. Remove sink from counter top and draw cutout line 5/16" inside the original rim outside line with 1-1/2" radius at corners. Drill hole at the inside corner of the cutout line. (Figure 2)
6. Using a sabre saw, start cutting from the drilled hole along the cutout line. Support cutout until the cut is completed. (Figure 3)

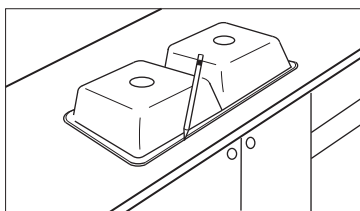


Figure 1

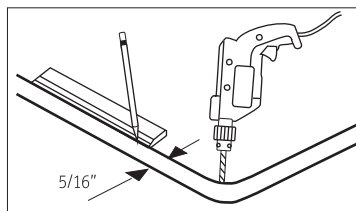


Figure 2

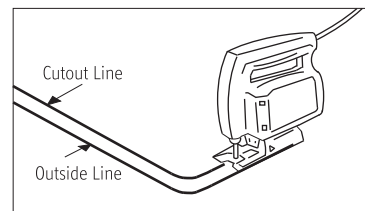


Figure 3

7. Apply caulking compound around the perimeter of the cutout opening
8. Attach faucet and sink strainer as necessary. Follow installation instructions supplied with faucet.